




TRADE MARK

# SEIKO

## CW SERIES



**SINGLE NEEDLE, HIGH SPEED, CYLINDER BED, VERTICAL AXIS HOOK, LOCKSTITCH MACHINES**

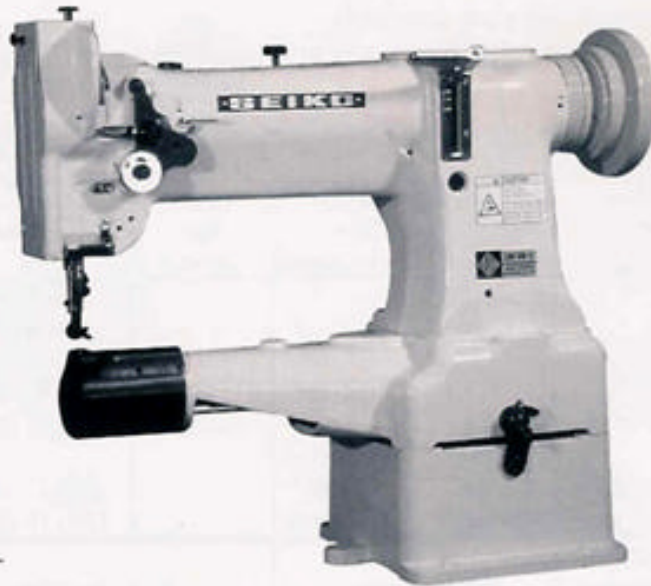

- Variety -

**CW-1**

No Feed



**CW-7B**

Compound feed, reverse stitch



**CW-8B-1**

Compound feed and alternating pressers, reverse stitch



**CW-8BV**

Compound feed and alternating pressers, reverse stitch, synchronized binder

CW-8B-1



### APPLICATIONS:

For darning and mending all types of medium to heavy weight materials (CW-1)

Designed for stitching tubular and curved work

Suitable for sewing such products as caps, cushions, boots, shoes, bags, luggage, handbags, travelware accessories, etc. (except CW-1)

■ FEATURES

- Cylinder bed
- Vertical axis hook
- Safety clutch prevents the hook from being damaged
- No Feeding mechanism allows sewing work in any direction as required for darning and mending (-1 only)
- Reverse stitching (except -1)
- Compound feed and alternating pressers mechanism assures even feeding of materials (-8B-1, -8BV)
- No Reverse stitch version available
- Semi-automatic lubrication system and large hook machines are available (LCW series)

■ SPECIFICATIONS

Variety	Max. speed (s.p.m.)	Max. stitch length	Clearance under Presser foot		Needle bar stroke	Needle (standard)
			(by pedal)	(by hand)		
-1	2,800	-	25/64" (10 mm)	- (-)		FOx3 (#18) FOx3(#110)
-7B	2,500	13/64" (5 mm)	25/64" (10 mm)	21/64" (8.5 mm)	1-5/16" (33.2 mm)	DPx17 (#22) 135x17 (#140)
-8B-1			35/64" (14 mm)	21/64" (8.5 mm)		
-8BV		11/64" (4.5 mm)	33/64" (13 mm)	9/32" (7 mm)		DPx17 (#18) 135x17 (#110)

Variety	Amount of lift of alternating presser foot	Working space	Cylinder size
-1	7/64" - 7/32" standard 1/8" (2.7 - 5.5 mm) (standard 3.2 mm)	10-5/32" x 4-21/64" (258x 110 mm)	2-9/16" (65 mm) dia.
-7B			
-8B-1			
-8BV			

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice

■ OPTIONAL PARTS AND ATTACHMENTS AT EXTRA CHARGE

PART NAME	PART NO. & USING MODEL
Finger guard	10955-01(FOR -7B) 10937 (FOR -8B-1, -8BV)
Belt cover	13425C (FOR ALL)
Binder	2A TYPE(2-FOLD) (FOR -8BV) 3A TYPE(3-FOLD) (FOR -8BV)
Feed dog ("L" shape)	13244 (FOR -8BV)
Vibrating p.f. ("L" shape)	13250 (FOR -8BV)

