



TRADE MARK

SEIKO


LPW

TWO NEEDLE
SERIES

(Angular stitch)



TWO NEEDLE, HIGH SPEED, POST BED, LARGE VERTICAL AXIS HOOK, DISENGAGEABLE NEEDLE BARS, LOCKSTITCH MACHINES

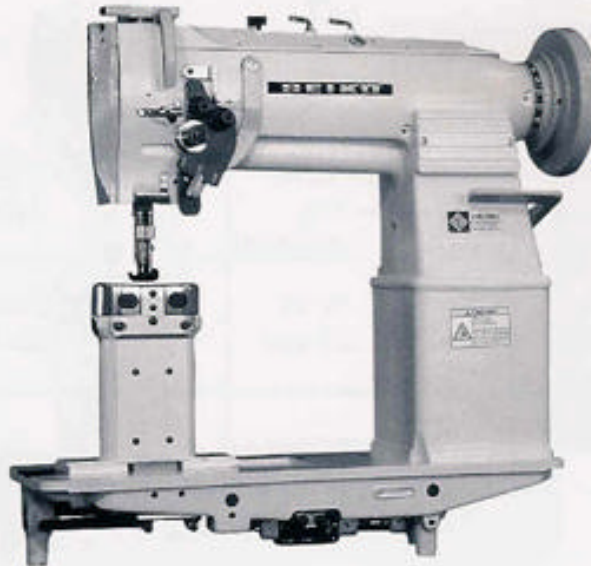

- Variety -

LPW-28BLK



LPW-27BLK

Compound feed, reverse stitch



LPW-28BLK

Compound feed and alternating pressers, reverse stitch



APPLICATIONS:

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials

Suitable for sewing operations which require decorative or functional angular stitching such as collars, pockets, shoe uppers, automobile upholstery, etc.

■ FEATURES

- Post bed and wide working space makes it easy for sewing of large materials
- Easy operation of disengageable right and left needle bars by use of finger touch lever
- Compound feed and alternating pressers mechanism assures even feeding of materials (-28BLK)
- Safety clutch prevents the hook from being damaged
- Semi-automatic lubrication system
- Reverse stitching
- Large vertical axis hook
- Various gauge sets available

■ SPECIFICATIONS

Variety	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot (by knee) (by hand)		Needle bar stroke	Needle (standard)
-27BLK	2,200	7/32" (5.5 mm)	35/64"	21/64"	1-9/32" (32.6 mm)	DPx17 (#24) 135x17 (#180)
-28BLK			(14 mm)	(8.5 mm)		
Variety	Amount of lift of alternating presser foot		Working space		Post height	Bed size
-27BLK	-		10-5/32" x 11-11/32" (258 x 288 mm)		7" (178 mm)	20-25/64" x 7" (518 x 177 mm)
-28BLK	3/32" - 3/16" standard 1/8" (2.5 - 5 mm) (standard 3.2 mm)					

NOTE

- (1) Speed depends on threads, materials and type of operation
 (2) Specifications subject to change without notice

■ NEEDLE GAUGE SIZE LIST

● STANDARD

	-27BLK	-28BLK
3/16" (4.8mm)	○	○
1/4" (6.4mm)	●	●
5/16" (7.9mm)	○	○
3/8" (9.5mm)	○	○
1/2" (12.7mm)	○	○
3/4" (19.1mm)	○	○

