



TRADE MARK


SEIKO

PWB

TWO NEEDLE
SERIES



**TWO NEEDLE, HIGH SPEED, POST BED, WHEEL FEED AND DRIVEN
ROLLER PRESSER, VERTICAL AXIS HOOK, LOCKSTITCH MACHINES**

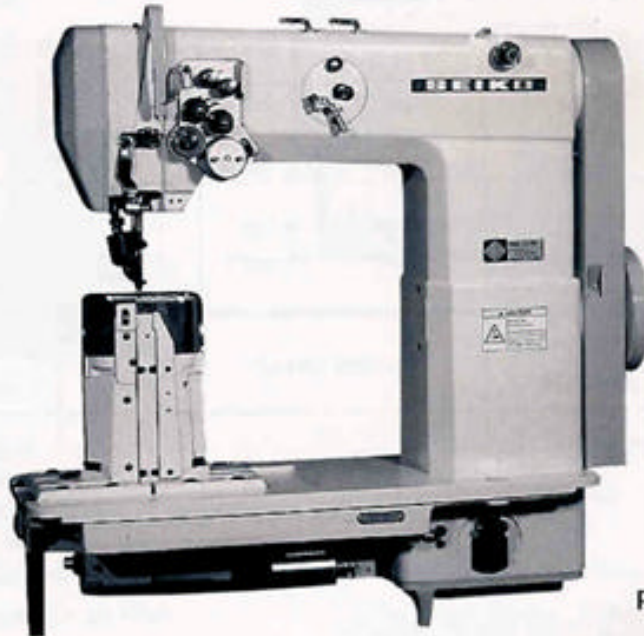

- Variety -

PWB-22GWC

- PLAIN -



-THREAD TRIMMER-

PWB-22GW-1

PWB-22GWC



APPLICATIONS:

For sewing slippery materials, leather, vinyl and polyethylene plastics, oil cloth, just any material difficult to feed, coated and laminated fabrics

Suitable for sewing hollow, tubular and curved articles, etc.

■ FEATURES

- Anti-friction ball and needle roller bearings for easy maintenance
- Simplified semi-automatic lubrication
- Vertical axis rotating hook
- Triple feeding mechanism assures even feeding of difficult to sew materials
- Built-in bobbin winder
- Automatic presser foot lift (FL) available
- Single needle machines available

■ SPECIFICATIONS

Variety	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot		Needle bar stroke	Needle (standard)
			(by knee)	(by hand)		
-22GW-1	2,500	5/32" (4 mm)	23/64"	9/32"	1-1/2" (38 mm)	DPx35 (#14) 134-35 (#90)
-22GWC			(9 mm)	(7 mm)		
Variety	Bed size	Roller size (standard)	Working space		Post height	Needle gauge size
-22GW-1	20-25/64" x 7" (518 x 177 mm)	1-13/32" (36 mm) dia.	10-15/64" x 11-7/32" (260 x 285 mm)		7" (178 mm)	1/32" - 3/16" standard 1/16" (0.8 - 4.8 mm) (standard 1.6 mm)
-22GWC						

NOTE

- (1) Speed depends on threads, materials and type of operation
 (2) Specifications subject to change without notice

■ VARIETY OF ROLLER PRESSER FOOT

Part No.	Diameter	Width
37336	36 mm (1-13/32")	4.2 mm (11/64")
37337	36 mm (1-13/32")	2.8 mm (7/64")
37149	26 mm (1-1/32")	4.2 mm (11/64")