




TRADE MARK

# SEIKO

## SSLD SERIES



**HEAVY DUTY, ULTRA LONG ARM, COMPOUND FEED AND ALTERNATING PRESSERS, GEAR DRIVEN PULLER FEED, DOUBLE CHAIN STITCH MACHINES**

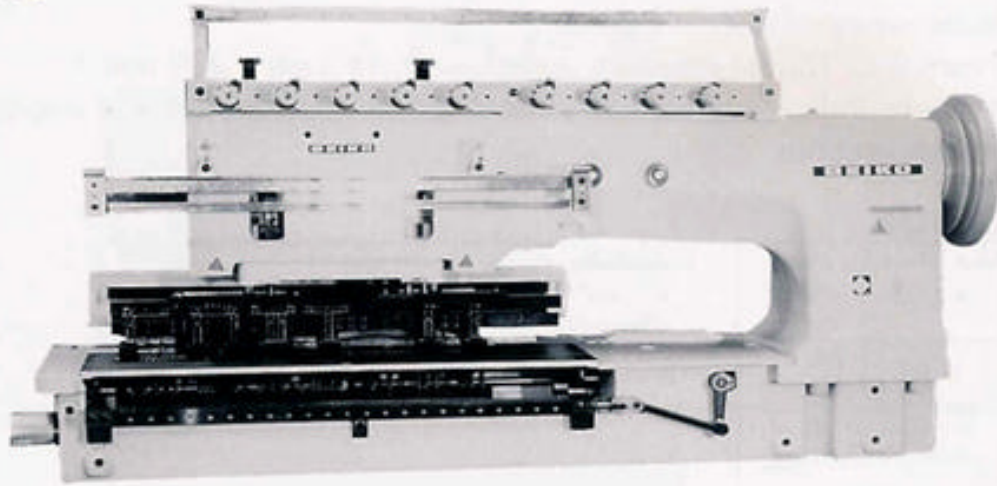

SSLD-188R

- Variety -



- SSLD-28R (2-needle)
- SSLD-38R (3-needle)
- SSLD-48R (4-needle)
- SSLD-58R (5-needle)
- SSLD-68R (6-needle)
- SSLD-78R (7-needle)
- SSLD-88R (8-needle)
- SSLD-98R (9-needle)
- SSLD-108R (10-needle)



- SSLD-118R (11-needle)
- SSLD-128R (12-needle)
- SSLD-138R (13-needle)
- SSLD-148R (14-needle)
- SSLD-158R (15-needle)
- SSLD-168R (16-needle)
- SSLD-178R (17-needle)
- SSLD-188R (18-needle)

\* Up to 72-needle machine available

\* Min. distance between needles is 1/4" (6.4 mm)



### APPLICATIONS:

For sewing medium to heavy weight materials

Suitable for automobile upholstery, tents and other similar products, etc

■ FEATURES

- Ultra long arm, work space 20 inch (508 mm)
  - Compound feed and alternating presser foot mechanism ensures even feeding of heaviest and most slippery articles to be sewn
  - Heavy duty top and bottom puller ensures accurate and efficient feeding
  - No bobbin winding or changing (double chain stitch)
  - Automatic presser foot lift (FL) available
  - Wide range of needle gauges available  
From 2 to 18 (Max. needle gauge width 18 inch / 460 mm )
- \*Please indicate us needle gauge size of each needle and overall when ordering

■ SPECIFICATIONS

	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot (by pedal)	Needle bar stroke	Needle (standard)
SSLD	1,200	23/64" (9 mm)	19/32" (15 mm)	1-17/32" (39 mm)	DVx59 (#22) 62x59 (#140)
	Amount of lift of alternating presser foot		Bed size	Working space	
SSLD	5/64" - 15/64" standard 9/64" (2 - 5.8 mm) (standard 3.6 mm)		38-37/64" x 7-31/64" (980 x 190 mm)	20" x 4-51/64" (508 x 122 mm)	