




TRADE MARK

SEIKO




STW-8B



SINGLE NEEDLE, VERTICAL AXIS HOOK, COMPOUND FEED AND ALTERNATING PRESSERS, REVERSE STITCH, LOCKSTICH MACHINES

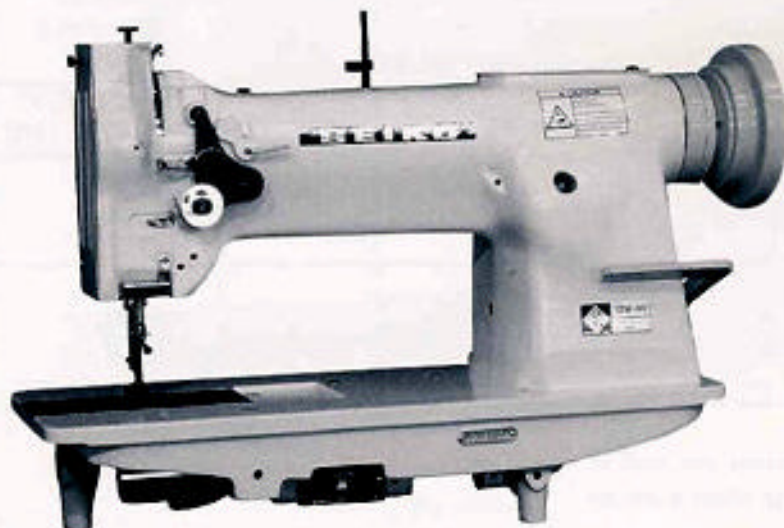

STW-8B

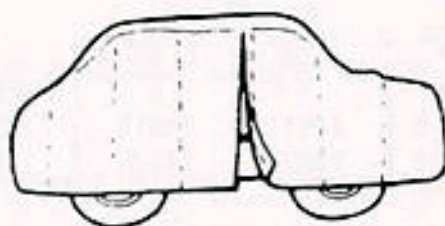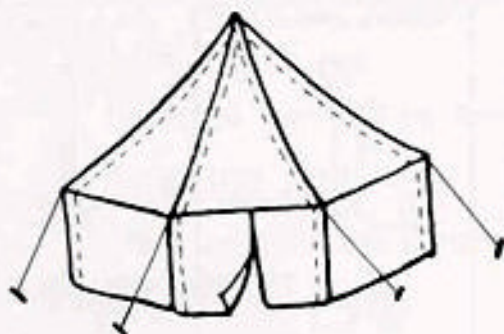

APPLICATIONS:

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials

Suitable for sewing such as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, orthopedic appliances, etc.

FEATURES

- Vertical axis hook
- Safety clutch prevents the hook from being damaged
- All sizes of cording feet available
- Reverse stitching
- Compound feed and alternating presser foot mechanism assures even feeding of material





SPECIFICATIONS

	Max. speed (s.p.m.)	Max. stitch length (5.5 mm)	Clearance under presser foot		Needle bar stroke (33.2 mm)	Needle (standard) DPx17 (#22) 135x17 (#140)
			(by knee) (14 mm)	(by hand) (8.5 mm)		
STW-8B	3,000	7/32" (5.5 mm)	35/64" (14 mm)	21/64" (8.5 mm)	1-5/16" (33.2 mm)	DPx17 (#22) 135x17 (#140)
	Amount of lift of alternating presser foot		Bed size		Working space	
	STW-8B	7/64"-7/32" standard 1/8" (2.7 - 5.5 mm) standard (3.2 mm)	18-25/32" x 7" (477 x 177 mm)		10-5/32" x 4-21/64" (258 x 110 mm)	

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice

SPECIAL PRESSER FOOT (FOR CORDING WORK)

Size A (mm)	4.5					6.2			
	5.2					6.6			
Size B (mm)	1/8"	5/32"	3/16"	1/4"	5/16"	1/8"	5/32"	3/16"	-
Size R (inch)	3.2	4	4.8	6.4	7.9	3.2	4	4.8	5
Vibrating P.F. No.	11890	11891	11892	11895	11896	11910	11911	11912	11893
Lifting P.F. No.	11900	11901	11902	11905	11906	11920	11921	11922	11903
Size A (mm)	6.2					Vibrating presser foot		Lifting presser foot	
	6.6					A		B	
Size B (mm)	-	1/4"	9/32"	5/16"	3/8"				
Size R (inch)	6	6.4	7.1	7.9	9.5				
Vibrating P.F. No.	11894	11913	11914	11915	11916				
Lifting P.F. No.	11904	11923	11924	11925	11926				

AVAILABLE MODEL VERSION

Model STW-26	Two needle, drop feed
Model STW-88M	Single needle, vertical edge trimming
Model STW-8M	Single needle, vertical edge trimming, no reverse stitch
Model STW-8VP	Single needle, synchronized binder, piping, no reverse stitch
Model STW-8VPM	Single needle, synchronized binder, piping, vertical edge trimming, no reverse stitch

 **SEIKO**
SEWING MACHINE CO., LTD.